

FORMAT

SOFAS AND MODULAR SEATING


Design: R&D Sitlosophy®










Format is a trapezoidal bench with padded seat on thin metal legs. Since it can be joined on the oblique sides, it lends itself to being used in the creation of compositions – from the linear sofa to the organically inspired seat, to be interpreted with maximum freedom thanks to the many finishes to choose from and the optional backrests.

Specifications

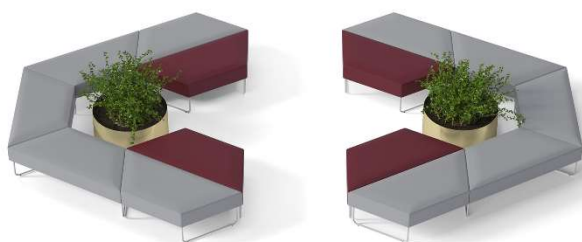




































Seat	Multilayer
Backrest	Multilayer
Padding	Flexible, polyurethane foam. Seat 16 cm thick, density 40-25 rc. Backrest 2 cm thick density 40 rc
Fixed base	Steel tube legs ø16x2, adjustable feet. Charcoal or white epoxy powders painted.


























Components and/or modules

Image	Dimension	Cod.	Description
	H 19 L 68-132 P 56	1640V	60° modular seating
	H 22 L 56	GT013AT	Pair of charcoal painted end legs
	H 22 L 56	GC02AT	Charcoal painted middle leg
	H 22 L 56	GT013B	Pair of white painted end legs
	H 22 L 56	GC02B	White painted middle leg
	H 45 L 57	SH1641	Backrest for 1640V, short side
	H 45 L 99	SH1642	Backrest for 1640V, long side

Coverings

Cat.	Covering	Description	Certifications	Folder Colors
1	 Madrid 5 colors	Weight: ± 230 g/sqm Composition: 100% PP polypropylene F.R. Martindale: 80,000 cycles	  Fire proof class 1IM	
1	 Cove 5 colors	Weight: ± 565 g/sqm Composition: 82% PVC – 7% Cotton – 11% Polyester Martindale: 50,000 cycles		
2	 Angel 13 colors	Weight: ± 228 g/sqm Composition: 100% polypropylene F.R. Martindale: 100,000 cycles	 Fire proof class 1IM	
2	 One 15 colors	Weight: ± 350 g/sqm Composition: 100% recycled polyester Martindale: 100,000 cycles	   Fire proof class 1IM	
2	 Gazebo 15 colours	Weight: ± 640 g/sqm Composition: 87.5% Plasticized Polyvinyl Chloride – 4.4% Cotton- 8.1% Polyester Martindale: 50,000 cycles	 Fire proof class 1IM	
2	 King-flex 15 colours	Weight: ± 300 g/sqm Composition: 100% polyester Trevira CS Martindale: 100,000 cycles	   Fire proof class 1IM	
3	 Secret 15 colors	Weight: ± 540 g/sqm Composition: 76% PVC – 2% PU – 22% PES Martindale: 60,000 cycles Features: waterproof, UV-resistant, suitable for outdoor	 Fire proof class 1IM	
3	 Mini 15 colors	Weight: ± 340 g/sqm Composition: 100% polyester Trevira CS Martindale: 100,000 cycles	    Fire proof class 1IM	
3	 Chili 15 colors	Weight: ± 470 g/sqm Composition: 100% Post-consumer recycled polyester FR Martindale: 60,000	    Fire proof class 1IM	

Cat.	Covering	Description	Certifications	Folder Colors
5		Step 15 colors Weight: ± 340 g/sqm Composition: 100% Trevira CS Martindale: 100,000 cycles	    Fire proof class 1IM	
5		Go Check 15 colors Weight: ± 310 g/sqm Composition: 100% Trevira CS Martindale: 80,000 cycles	     Fire proof class 1IM	
7		Grain 15 colors Weight: ± 615 g/sqm Composition: 100% Trevira CS Martindale: 100,000 cycles California TB 117-2013		
7		Focus 15 colors Weight: ± 660 g/sqm Composition: 100% New Zealand Wool Martindale: 100,000 cycles CLASS 1 IM - UNI 9175	 	
7		Extrema 15 colors Weight: ± 480 g/sqm Composition: 63% PU – 29% COT – 8% PES Martindale: 150,000 cycles Features: Antibacterial protection	 Ultra-Fresh* Fire proof class 1IM	

Certifications



Ministerial Homologation Class 1IM on request. Search for FSC® products



<https://www.sitlosophy.com/en/seat/format/>

INSTRUCTIONS FOR USE AND MAINTENANCE

GENERAL INFORMATION

If the chair is used as a VDU station, the angles between the foot and calf, calf and thigh, thigh and back, forearm and shoulder must be approximately 90°

ADJUSTMENT PISTON

Instructions for use: The height adjustment of the seat with gas piston is obtained by pulling the lever of the mechanism upwards.

Maintenance instructions: the piston does not require any particular maintenance but it is advisable to avoid direct contact with the sliding parts as they contain lubricant. Warnings: Do not open the gas column by force. Staff only
Specialized can replace or repair the gas column.

PADDED PARTS

Care instructions:

Leatherette: Clean with a damp cloth, mild soap and rinse well with water. It is imperative to avoid using solvents, bleaches or other chemical detergents, as they could alter the aesthetic and physical characteristics of the product. In general, light-coloured materials cannot be put in contact with clothes containing unfixed dyes (e.g. jeans and derivatives) in order to avoid stains or streaks that are difficult to remove.

Fabric: Clean using a damp sponge by moistening the fabric without getting it wet. The use of a suction brush is not recommended, as traces of shampooing may remain on the upholstery, which would change the fire behaviour of the fabric. Gently dab from the edges to the centre of the stain, do not rub. After stain removal, it is necessary to proceed with a complete drying of the fabric, avoiding subjecting it to high temperatures. The use of solvents, bleaches or other chemical detergents should be strictly avoided, as they could alter the aesthetic and physical characteristics of the product.

Leather: Clean regularly with a soft, dry cloth. Any stains can be removed using a cloth dampened with water and neutral soap by making regular circular movements. Dry gently after treatment. Gently dab from the edges to the centre of the stain, do not rub. The use of solvents, bleaches or other chemical detergents should be strictly avoided, as they could alter the aesthetic and physical characteristics of the product.

Wool: Use the vacuum cleaner regularly with a smooth nozzle, without brushing or scrubbing in any way. The use of solvents, bleaches or other chemical detergents should be strictly avoided, as they could alter the aesthetic and physical characteristics of the product.

Warnings: Some upholstery (leather, imitation leather, weft fabrics) may have a slightly

different aesthetic result depending on the batch, the dyeing bath and the product to be made. In particular, the leather used for the upholstery of sofas and armchairs is a material of natural origin so any small imperfections are not to be considered defects. The leather upholstery, with use, can change appearance and texture over time, this is to be considered normal.

UNPADDED PARTS

Care instructions:

Mesh: Use the vacuum cleaner regularly with a smooth spout, without brushing or scrubbing in any way. Any stains can be removed using a cloth dampened with water and neutral soap with regular circular movements. The use of solvents, bleaches or other chemical detergents should be strictly avoided, as they could alter the aesthetic and physical characteristics of the product.

Exposed wood: Clean using a dry cotton cloth to remove any dust residue or minor impurities. Do not use wet or damp cloths. To avoid unsightly scratches, do not use abrasive cloths, chemicals or powder cleaners that may damage the paintwork. avoid the use of solvents, bleaches or other chemical detergents, as they could alter the aesthetic and physical characteristics of the product. Wooden surfaces, being a natural material themselves, may undergo color alterations with use and over time.

Plastic: Plastic surfaces should generally be cleaned with a damp and soft cloth soaked in water, it is not recommended to use dry cloths that could load with rubbing electrostatically the plastic surface by attracting dust. For more stubborn stains, neutral liquid soap can be diluted in water in moderation. The use of solvents, bleaches or other chemical detergents should be strictly avoided, as they could alter the aesthetic and physical characteristics of the product. Avoid all abrasive substances such as washing powders, abrasive pastes, scouring pads or rough sponges. Avoid dragging objects that can scratch the material on surfaces.

PAINTED / CHROME-PLATED METAL BASES AND STRUCTURES

Maintenance and cleaning instructions: Both steel or aluminum metal surfaces and painted surfaces should be cleaned with a damp, soft cloth soaked in warm water; For more stubborn stains, it is possible to dilute neutral liquid soap in water, in moderation. Always dry after cleaning with a soft cloth or chamois skin. Do not use creams and pastes suitable for cleaning steel ovens, do not use chlorine, do not use bleach and other aggressive detergents. It is not

recommended to use abrasive pastes, scouring pads and scouring pads that can scratch metal surfaces. Avoid contact with floor cleaners containing corrosive solvents such as but not limited to muriatic acid, ammonia, rubbing alcohol, bleach, sulphuric acid, soda, etc.